Shafts

Both Ends Threaded with Wrench Flats / Cross-Drilled Hole

High Precision Linear Shafts for High Precision Assembly
Features: Perpendicularity ⊥0.03, Concentricity ◎0.02



P.237

For products uncovered by the e-Catalog Standards, see P.131.

For High Precision Linear Shafts with high perpendicular precision of the shaft end (⊥ 0.03), see P.237. For Shafts w/o Wrench Flats or Cross-Drilled Hole, see P.181.

RoHS

- Annealing may lower hardness at wrench flats, cross-drilled hole and shaft end machined areas (effective thread length + approx. 10mm). P.142
- Cross-drilled hole areas may be out of O.D. tolerances due to annealing-induced deformation.
- L Dimension Tolerance, Circularity, Straightness, Perpendicularity, Concentricity and Changes in Hardness P.141
- Features of Low Temp. Black Chrome Plating P.156

Type					M Material	H Hardness	S Surface Treatment
With Wrench Flats			With Cross-Drilled Hole				
D Tol. g6	D Tol. h5	D Tol. f8	D Tol. g6	D Tol. f8			
SFAU	SFUU	-	SFHM	-	SUJ2	For Effective Hardened Depth of Induction Hardening, see P.142. SUJ2 58HRC~ SUS440C Equivalent 56HRC~	-
SSFAU	SSFUU	-	SSFHM	-	SUS440C Equivalent		Hard Chrome Plating - Plating Hardness: HV750 –, Plating Thickness: 5μ or More
PSFAU	PSFUU	-	PSFHM	-	SUJ2		Low Temp. Black Chrome Plating
PSSFAU	PSSFUU	-	PSSFHM	-	SUS440C Equivalent		
RSFAU	-	-	RSFHM	-	SUJ2		
-	-	PSFGU	-	PSGHM	S45C Equivalent	-	Hard Chrome Plating - Plating Hardness: HV750 –, Plating Thickness: 10μ or More
-	-	PSSFGU	-	-	SUS304		

For plated products, the surface roughness of D part is 0.4/; and for unplated products, it is 0.4/G.

D	D Tol. g6	D Tol. h5	D Tol. f8
6	-0.004 -0.012	0 -0.005	-0.010 -0.028
8	-0.005 -0.014	0 -0.006	-0.013 -0.035
10			
12	-0.006 -0.017	0 -0.008	-0.016 -0.043
13			
15			
16			
18			
20	-0.007 -0.020	0 -0.009	-0.020 -0.053
25			
30			
35	-0.009 -0.025	0 -0.011	-0.025 -0.064
40			
50			

With Wrench Flats

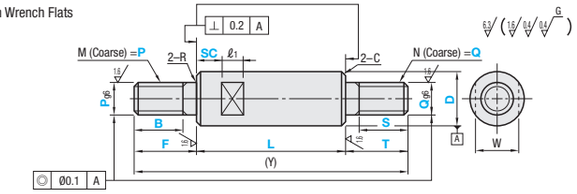

With Cross-Drilled Hole (8≤D≤30, L≤500)

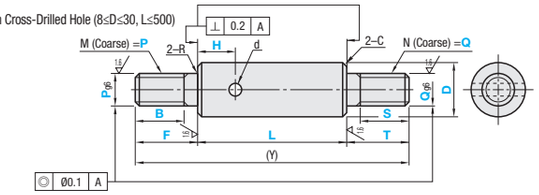

Part Number Type	D	1mm Increments L	F, T	B, S	P, Q Selection	Wrench Flats Dimensions SC	W	ℓ1	Cross-Drilled Hole Dimensions H	d	(Y) Max.	R	C
(With Wrench Flats) (D Tol. g6) SFAU SSFAU PSFAU PSSFAU RSFAU (D≤30, L≤500, Ymax≤800) (D Tol. h5) SFUU SSFUU PSFUU PSSFUU (D Tol. f8) PSFGU PSSFGU	6	25~ 796	2≤F≤Px5 2≤T≤Qx5	(When P≤6) B≤F-2 (When P=8, 10) B≤F-3 (When P≥12) B≤F-5 (When Q≤6) S≤T-2 (When Q=8, 10) S≤T-3 (When Q≥12) S≤T-5 (W/o Threads) B=0 S=0 B, S≥Pitchx3	3 4 5	SC = 1mm Increment SC+ℓ1≤L SC≥0 Details of Wrench Flats P.142	5	8	H=1mm Increment L≥H+d/2+2 H≥d/2+2	-	600	0.3 or Less	0.5 or Less
(With Cross-Drilled Hole) 8≤D≤30, L≤500 (D Tol. g6) SFHM SSFHM PSFHM PSSFHM RSFHM (D Tol. f8) PSGHM	8	25~ 996			3 4 5 6		7			3	800		
	10	25~ 996			4 5 6 8		8				800		
	12	25~1196			5 6 8 10		10	10			1000		
	13	25~1196			5 6 8 10 12		11			4	1000		
	15	25~1196			5 6 8 10 12		13				1000		
	16	25~1196			5 6 8 10 12		14				1200		
	18	25~1196			5 6 8 10 12 16		16			6	1200		
	20	25~1196			6 8 10 12 16		17				1200		
	25	25~1196			8 10 12 16 20 24		22			7	1200		
	30	25~1496			8 10 12 16 20 24		27	15			1500		
	35	25~1496			10 12 16 20 24 30		30			-	1500	0.5 or Less	1.0 or Less
	40	25~1496			12 16 20 24 30		36	20			1500		
	50	25~1496			16 20 24 30		41				1500		

8≤D≤30 and L≤500 are applicable for Shafts with Cross-Drilled Hole.

Thread machining will not be applied to B=0 or S=0.

Coarse Thread Dimensions M	Pitch
3	0.5
4	0.7
5	0.8
6	1.0
8	1.25
10	1.5
12	1.75
16	2.0
20	2.5
24	3.0
30	3.5

Ordering Example

Part Number	L	F	B	P	T	S	Q	SC	H
SFHM15	300	F28	B16	P6	T17	S12	Q12	-	H8

Alterations

Part Number	L	F	B	P(PMC, PMS)	T	S	Q(QMC, QMS)	SC	H	(LKC ··· etc.)
SFAU30	300	F40	B30	P20	T50	S40	Q16	SC10	-	LKC

Alteration Details P.143

Alterations	Code	Spec.
	LKC	Alteration to L dimension tolerance Ordering Code LKC L dimensions can be specified in 0.1mm increment for LKC. L<200 ···L±0.03 200≤L<500 ···L±0.05 L≥500 ···L±0.1
	SX	Second Set of Wrench Flats Ordering Code SX15 Application Notes Only applicable to Shafts with Wrench Flats. SC=1mm Increment SC+SX+ℓ1x2<L SX≥0 Orientation between two set screw flats is not coplanar. D W ℓ1: 6 5 8; 8 7 8; 10 8 10; 12 10 10; 13 11 10; 15 13 10; 16 14 10; 18 16 10; 20 17 10; 25 22 10; 30 27 15; 35 30 15; 40 36 20; 50 41 20
	FC	Set Screw Flat at One Location Ordering Code FC10-E8 FC, E=1mm Increment D≤30:FC≤5xD, D≥35:FC≤3xD E=0 or E≥2 Not available in combination with WFC. D h: 6~18 1; 20~40 2; 50 3
	WFC	Set Screw Flats at Two Locations Ordering Code WFC8-A8-E4 WFC, A, E=1mm Increment D≤30:WFC≤5xD, D≥35:WFC≥3xD A(E)=0 or A(E)≥2 Orientation between set screw flats is not coplanar. Not available in combination with FC. D h: 6~18 1; 20~40 2; 50 3

Alterations	Code	Spec.
	RC	90-deg. Set Screw Flat at One Location Ordering Code RC10 Application Notes Only applicable to D=10~30. Not available in combination with WRC.
	WRC	90-deg. Set Screw Flats at Two Locations Ordering Code WRC10-Y10 Application Notes Only applicable to D=10~30. Not available in combination with RC. Orientation between two set screw flats is not coplanar. For details, see Shaft Alteration Overview. P.143
	PMC PMS QMC QMS	Change to Fine Thread Ordering Code PMC14 (P is changed to PMC) PMS14 (P is changed to PMC) QMC14 (Q is changed to QMC) QMS14 (Q is changed to QMS)
Undercut 	PC QC	PC: Adds undercut(s) on P dimension area. QC: Adds undercut(s) on Q dimension area. Ordering Code PC For detailed undercut dimensions, see P.141. Application Notes Applicable to M=6 or more. Only D≤8 is applicable. Not applicable to D=Q and D=P.

Please see Shaft Alteration Overview for details if provided. P.143

When selecting multiple alteration additions, the distance between machined areas should be greater than 2mm. P.144

Alterations may lower hardness. See P.142.

Part Number Type	D	Unit Price Min. L 50	L51 100	L101 150	L151 200	L201 250	L251 300	L301 350	L351 400	L401 450	L451 500	L501 550	L551 600	L601 650	L651 700	L701 750	L751 800	L801 850	L851 900	L901 950	L951 1000	L1001 1100	L1101 1200	L1201 1300	L1301 1400	L1401 1496
SFAU SFUU SFHM	6																	-	-	-	-	-	-	-	-	-
	8																					-	-	-	-	-
	10																					-	-	-	-	-
	12																							-	-	-
	13																							-	-	-
	15																							-	-	-
	16																							-	-	-
	18																							-	-	-
	20																							-	-	-
	25																							-	-	-
	30																									
	35																									
	40																									
	50																									
SSFAU SSFUU SSFHM	6																	-	-	-	-	-	-	-	-	-
	8																					-	-	-	-	-
	10																					-	-	-	-	-
	12																							-	-	-
	13																							-	-	-
	15																							-	-	-
	16																							-	-	-
	18																							-	-	-
	20																							-	-	-
	25																							-	-	-
	30																									
	35																									
	40																									
	50																									
PSFAU PSFUU PSFHM	6																	-	-	-	-	-	-	-	-	-
	8																					-	-	-	-	-
	10																					-	-	-	-	-
	12																							-	-	-
	13																							-	-	-
	15																							-	-	-
	16																							-	-	-
	18																							-	-	-
	20																							-	-	-
	25																							-	-	-
	30																									
	35																									
	40																									
	50																									
PSSFAU PSSFUU PSSFHM	6																	-	-	-	-	-	-	-	-	-
	8																					-	-	-	-	-
	10																					-	-	-	-	-
	12																							-	-	-
	13																							-	-	-
	15																							-	-	-
	16																							-	-	-
	18																							-	-	-
	20																							-	-	-
	25																							-	-	-
	30																									
	35																									
	40																									
	50																									

For D tolerance h5, add the relevant surcharge to the prices above.

For Shafts with Cross-Drilled Hole, subtract the relevant charge from the prices above.

Part Number Type	D	Unit Price Min. L 50	L51 100	L101 150	L151 200	L201 300	L301 400	L401 500
RSFAU RSFHM	6							
	8							
	10							
	12							
	13							
	15							
	16							
	18							
	20							
	25							
	30							

For Shafts with Cross-Drilled Hole, subtract the relevant charge from the prices above.

Example

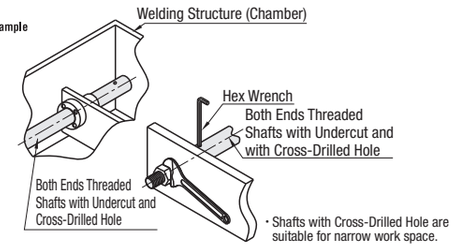

Part Number Type	D	Unit Price Min. L 100	L101 200	L201 400	L401 600	L601 800	L801 1000	L1001 1200	L1201 1496
PSFGU PSGHM	6					-	-	-	-
	8						-	-	-
	10						-	-	-
	12, 13							-	-
	15, 16								-
	18, 20								-
	25								-
	30								
	35								
	40								
	50								
PSSFGU	6					-	-	-	-
	8						-	-	-
	10						-	-	-
	12, 13							-	-
	15, 16								-
	18, 20								-
	25								-
	30								
	35								
	40								
	50								

For Shafts with Cross-Drilled Hole, subtract the relevant charge from the prices above.