




V-Shaped Locating Block Sets

Flat Bottom Type


■Features: The V Groove 70° Type has wider contacting surface compared to that of the 90° Type, suitable for misalignment prone rotating fixtures.



Type	Standard CVTA, CVTA12C CVTA16C, CVTAS CVTACS	Tapped Hole CVTAT CVTAST	Upper Plate Holding CVTAB CVTABS	V Groove 70° CVTAK	Long CVTAL
------	---	--------------------------------	--	-----------------------	---------------

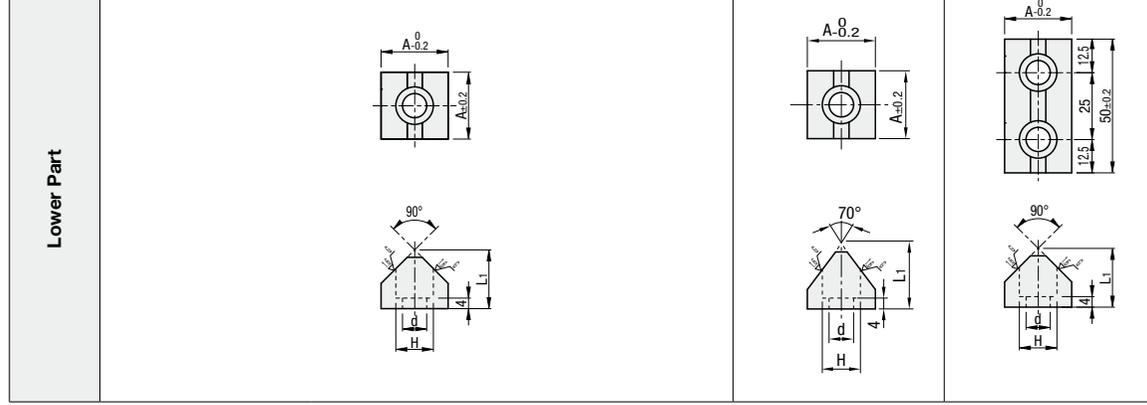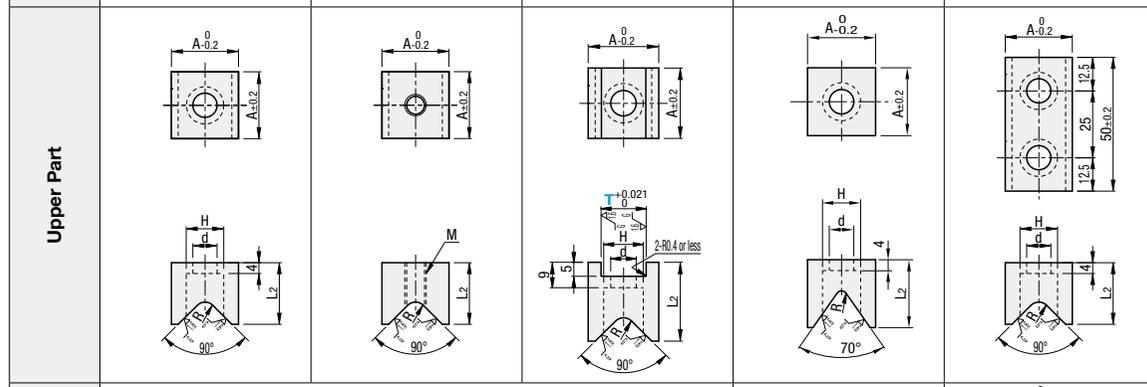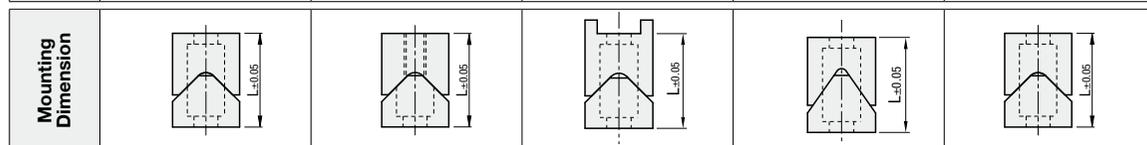

Type	Part Number	T	L	L1	L2	A	H	d	R	M (Coarse)	Unit Price	Volume Discount Rate
											1 - 19 set(s)	20 -
Standard	CVTA	-	35	22	23	25	14	9	4	-	-	-
	CVTA12C	-	20	12	13	12	8	4.5	2	-	-	-
	CVTA16C	-	25	-	16	16	-	-	2	-	-	-
	CVTAS	-	19	16	19	25	11	7	4	-	-	-
	CVTACS	-	25	17	20	-	-	-	2	-	-	-
Tapped Hole Type	CVTAT	-	35	22	23	25	14	9	4	M8	-	-
	CVTAST	-	25	16	19	25	11	7	4	M6	-	-
Upper Plate Holding Type	CVTAB	-	35	20	26	20	9.5	5.5	2	-	-	-
	CVTAB	12	35	22	28	25	14	9	4	-	-	-
	CVTAB	16	35	22	28	25	14	9	4	-	-	-
V Groove 70° Type	CVTAK	-	35	25	25	25	14	9	2	-	-	-
	CVTAL	-	35	22	23	25	14	9	4	-	-	-

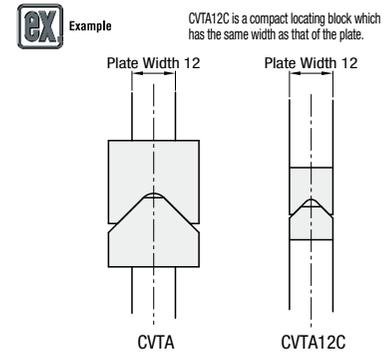

Ordering Example
Part Number
CVTA
CVTA12




V-Shaped Locating Block Sets

Plate Holding Type


■Features: Plate holders on upper/lower sides enable easy mounting on thin flat bars.



Type	Standard CVTB CVTBS	Tapped Hole CVTBST	Long CVTBL
------	---------------------------	-----------------------	---------------

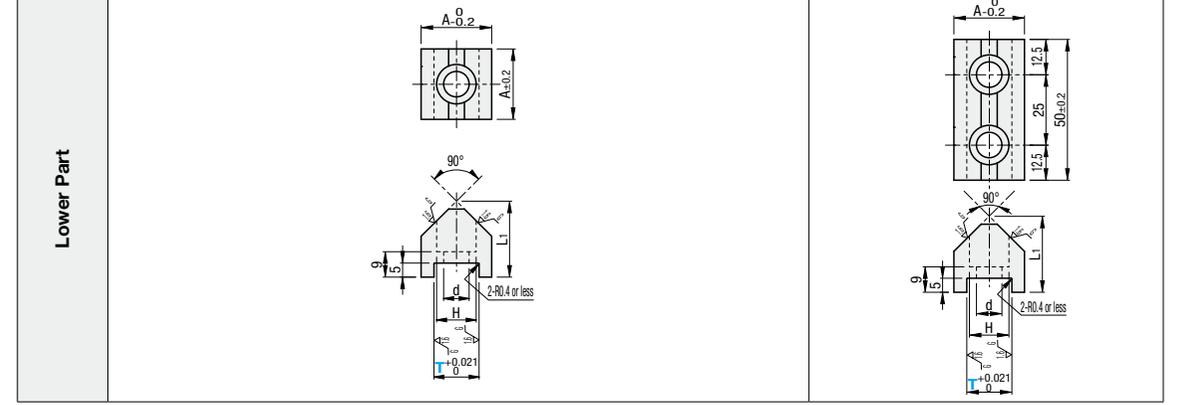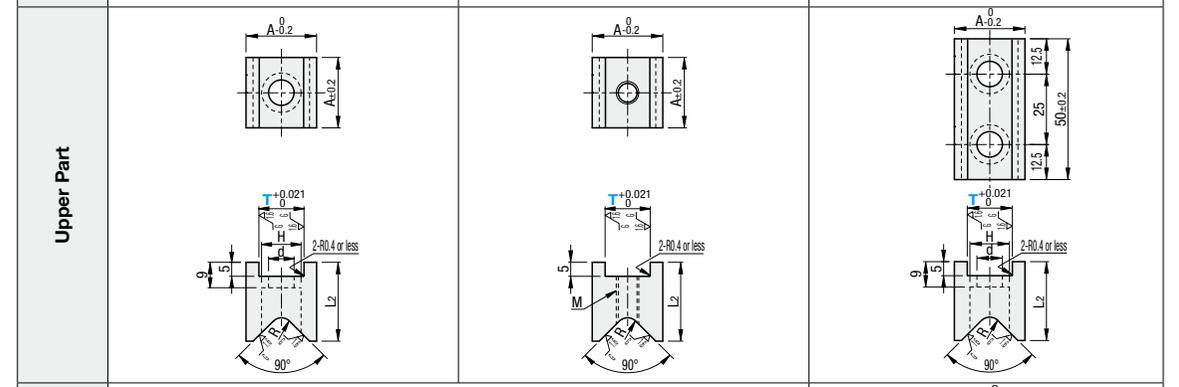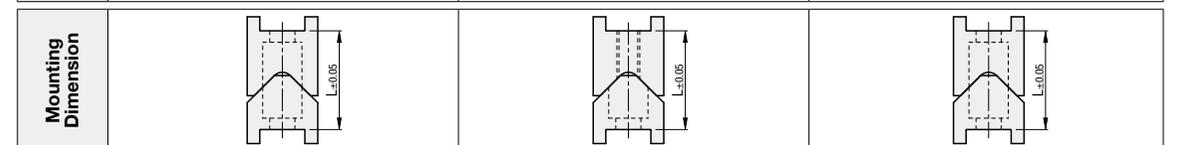

Type	Part Number	T	L	L1	L2	A	H	d	R	M (Coarse)	Unit Price	Volume Discount Rate
											1 - 19 set(s)	20 -
Standard	CVTB	12	35	25	26	20	9.5	5.5	2	-	-	-
	CVTB	16	35	27	28	25	14	9	4	-	-	-
	CVTB	19	35	27	28	25	14	9	4	-	-	-
Tapped Hole Type	CVTBST	12	25	19	22	20	9.5	5.5	2	-	-	-
	CVTBST	16	25	21	24	25	11	7	4	M6	-	-
Long Type	CVTBL	12	35	25	26	20	9.5	5.5	2	-	-	-
	CVTBL	16	35	27	28	25	14	9	4	-	-	-
	CVTBL	19	35	27	28	25	14	9	4	-	-	-

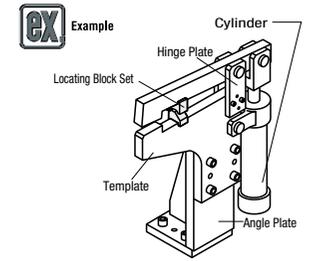

Ordering Example
Part Number
CVTB16

U/T-Shaped Locating Block Sets

Tapered Pin Locating Block Sets






Standard, Counterbored, Short

■ Features: Uneven shape prevents shifts when mounted.



RoHS

Material: S45C Equivalent
Hardness: 42-45HRC

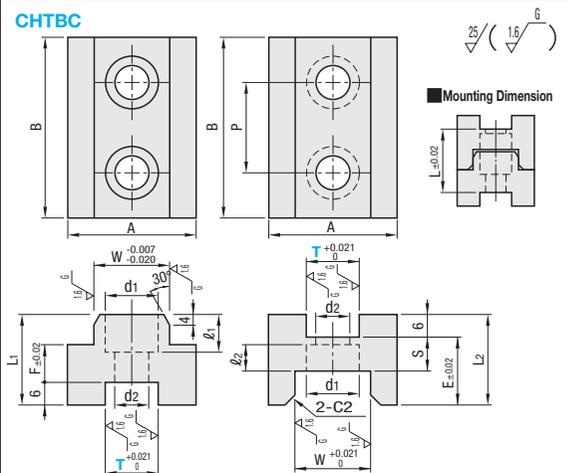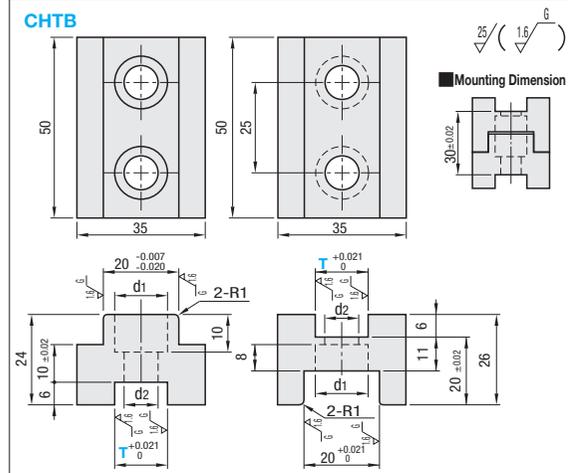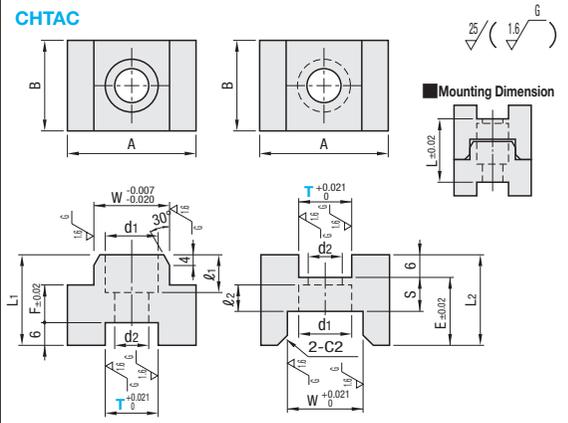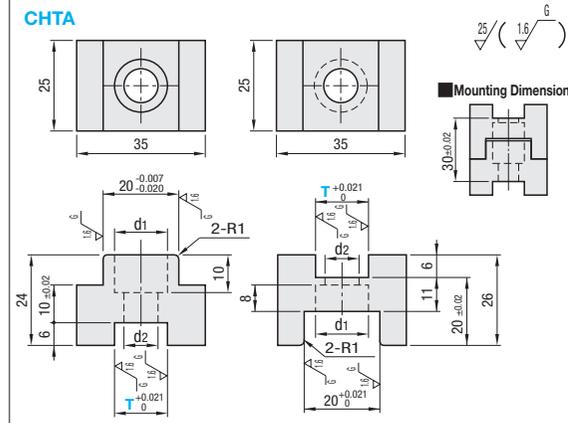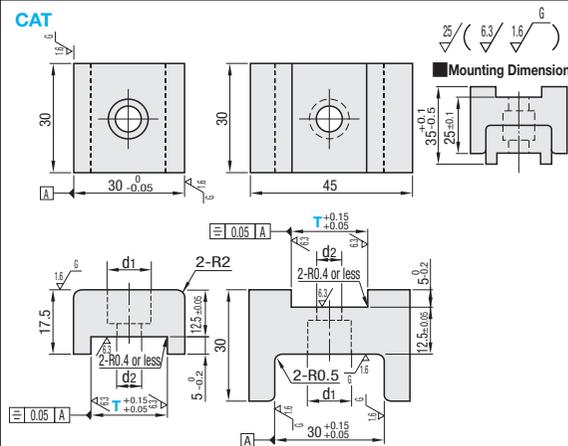


Part Number Type	d1	d2	Unit Price 1-19 set(s)	Volume Discount Rate 20-
CAT	14	11	6.5	
	16	11	6.5	
	20	11	6.5	
CHTA	12	9.5	5.5	
	16	14	9	
	19	14	9	
CHTB	12	9.5	5.5	
	16	14	9	
	19	14	9	

Part Number Type	T	d1	d2	L	A	B	W	L1	ℓ1	F	L2	ℓ2	E	S	P	Unit Price 1-19 set(s)	Volume Discount Rate 20-
CHTAC	12	9.5	5.5	30	35	25	20	24	10	10	26	8	20	11	-		
	16	14	9	30	35	25	20	24	10	10	26	8	20	11	-		
	16L	9.5	5.5	25	30	20	17	21	6.5	7	24	6	18	9	-		
CHTBC	19	14	9	30	35	25	20	24	10	10	26	8	20	11	-		
	16	14	9	30	35	50	20	24	10	10	26	8	20	11	25		
	16L	9.5	5.5	25	30	40	17	21	6.5	7	24	6	18	9	20		
19	14	9	30	35	50	20	24	10	10	26	8	20	11	25			

■ Features: Tapered tip enables smooth insertion and accurate positioning.




RoHS

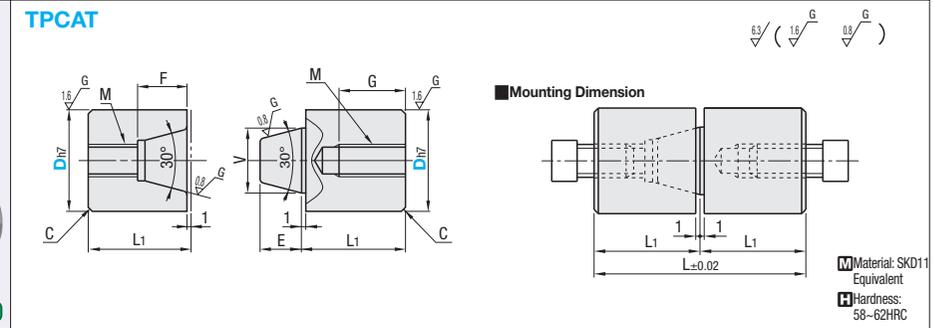

Part Number Type	Dh7	L	L1	F	G	V	E	M	C	Unit Price
TPCAT	12	32	16	7	8	8	5	M4	0.5	
	12C	24	12		5					
	16	32	16		10					
	16C	26	13	7	10	6	M5			
	20	44	22	11	12	12	8	M6		
	20C	36	18	12	8	16	10	M8		
25	50	25	12	16	20	12	M10			
25C	42	21	14	12	20	12				
30	60	30	14	20	20	12				




RoHS

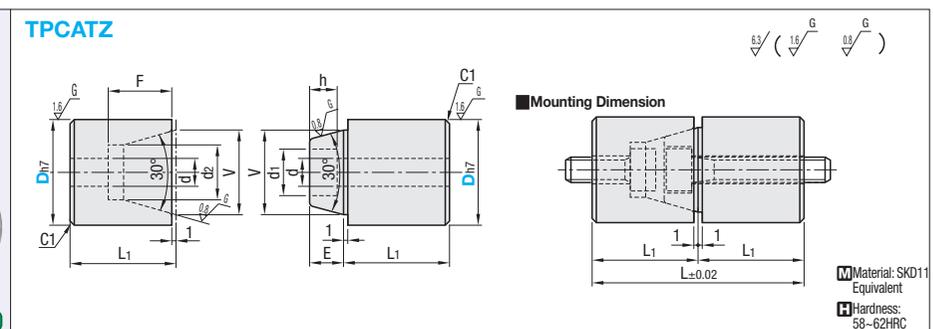

Part Number Type	Dh7	L	L1	F	V	E	d1	d	d2	h	Applicable Screw	Unit Price
TPCATZ	20	44	22	16	16	8	8	4.5	10	5	M4	
	25	50	25	19	20	9	11	6.6	13.5	7	M6	
	30	60	30	23	25	12	14	9	17	9	M8	



RoHS

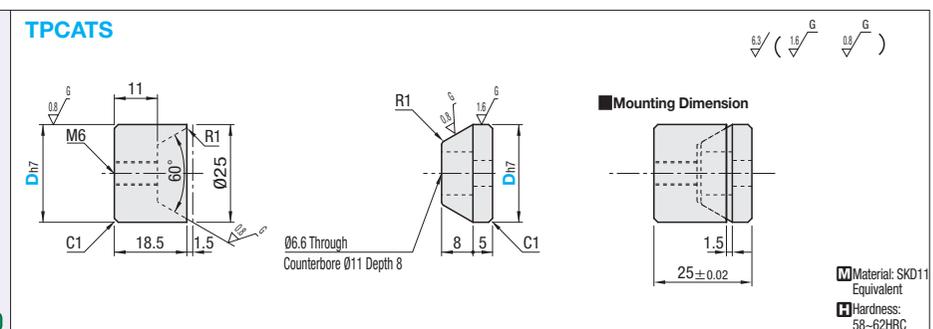

Part Number Type	Dh7	Applicable Screw	Unit Price
TPCATS	25	M6	

Ordering Example
Part Number
TPCAT12
TPCAT25
TPCATS25

