

L-Gibs - Configurable Type


Steel / Lubrication-Free Copper Alloy / Length & Screw Hole Pitch Configurable

■ Features: Block slides steadily by stepped part of L-Gibs.

■ Steel



Type	Material	Surface Treatment	Hardness
GRRF	S45C	-	-
GRRMF		Hardened Electroless Nickel Plating (Plating after Grinding)	HV500~
GRMZ		High-strength Brass Alloy Solid Lubricant Embedded	-

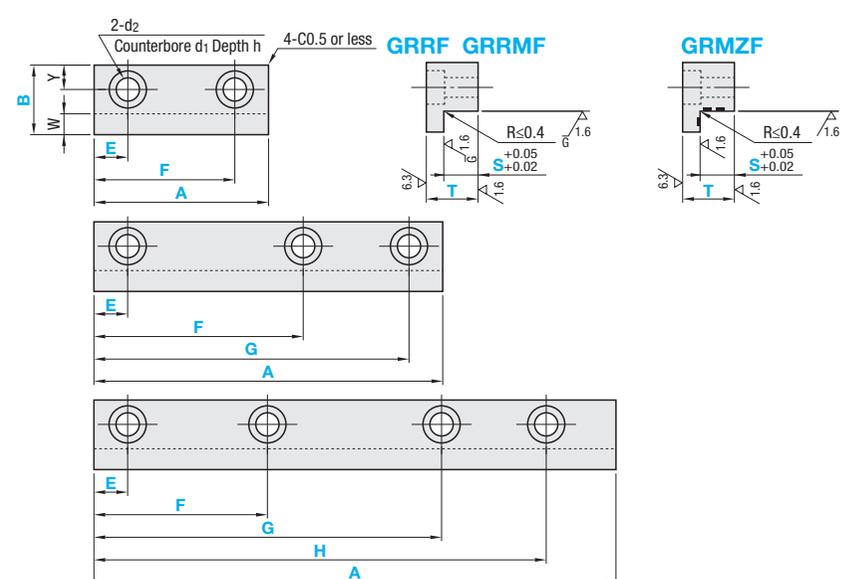

■ Lubrication-Free Copper Alloy



RoHS ⚠ Hardened electroless nickel plated products may look slightly different in color from the image but the quality is the same.


Part Number Type	T	S	A	0.5mm Increment (Hole Position)				W	Y	d1	d2	h				
				E	F	G	H									
GRRF GRRMF GRMZ	15	10	15	5	8	40-99(95)	6.0-80.0	17.0-94.0(89.0)	-	-	5	5	8	4.5	4.5	
						100-120	6.0-100.0	26.0-114.0	-	-	-	-	-	-		
						60-99(95)	8.0-80.0	18.0-91.0(87.0)	-	-	-	-	-	-		
	20	15	20	5	8	10	100-200	8.0-170.0	18.0-180.0	28.0-192.0	-	5	7	9.5	5.5	5.5
							80-129(125)	10.0-110.0	22.0-119.0(115.0)	-	-	-	-	-	-	
							130-179(175)	10.0-140.0	22.0-155.0	34.0-169.0(165.0)	-	-	-	-	-	
	25	20	25	8	10	15	180-250	10.0-180.0	22.0-200.0	34.0-220.0	46.0-240.0	5	10	11	6.5	6.5
							100-149(145)	12.0-120.0	24.0-137.0(133.0)	-	-	-	-	-	-	
							150-199(195)	12.0-150.0	24.0-165.0	36.0-187.0(183.0)	-	-	-	-	-	
	30	25	30	10	15	200-250(300)	12.0-180.0(230.0)	28.0-200.0(250.0)	44.0-220.0(270.0)	60.0-238.0(288.0)	8	10	14	9	9	
						-	-	-	-	-	-	-	-	-		
						-	-	-	-	-	-	-	-	-		

⚠ When B=15 or T=10, 5 is the only option for S. ⚠ GRMZ values are indicated in (). ⚠ A dimension of GRMZ is in 5mm increment. ⚠ A dimension of GRRF and GRRMF is up to 250.

Part Number Type	B	T	Unit Price											
			A40-99	A100-129	A130-199	A200-250	A40-95	A100-125	A130-165	A170-195	A200-250	A255-300		
GRRF GRRMF	15	10	GRRF	GRRMF	GRRF	GRRMF	GRRF	GRRMF	GRRF	GRRMF	-	-	-	-
			-	-	-	-	-	-	-	-	-	-	-	
			-	-	-	-	-	-	-	-	-	-	-	
	20	15	GRRF	GRRMF	GRRF	GRRMF	GRRF	GRRMF	GRRF	GRRMF	-	-	-	-
			-	-	-	-	-	-	-	-	-	-	-	
			-	-	-	-	-	-	-	-	-	-	-	
	25	20	GRRF	GRRMF	GRRF	GRRMF	GRRF	GRRMF	GRRF	GRRMF	-	-	-	-
			-	-	-	-	-	-	-	-	-	-	-	
			-	-	-	-	-	-	-	-	-	-	-	
	30	25	GRRF	GRRMF	GRRF	GRRMF	GRRF	GRRMF	GRRF	GRRMF	-	-	-	-
			-	-	-	-	-	-	-	-	-	-	-	
			-	-	-	-	-	-	-	-	-	-	-	

⚠ A Dimension of GRRF and GRRMF is up to 250.

Ordering Example: Part Number - T - S - A - E - F - G - H
GRRF20 - 20 - 5 - 175 - E8.0 - F95.0 - G160.0



Gibs


Lubrication-Free Copper Alloy

■ Features: Maintenance-free and economical L-Gibs.

■ Steel



Type	Material
SGRMZ	High-strength Brass Alloy Solid Lubricant Embedded

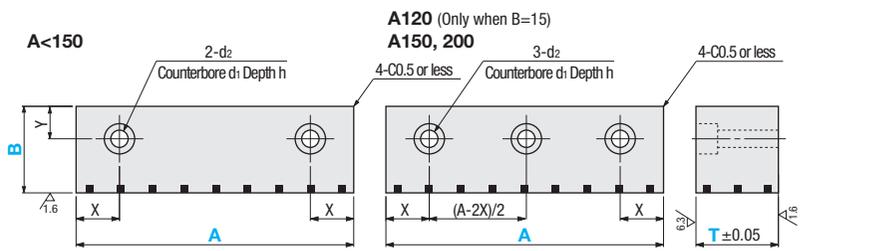

RoHS

Part Number Type	B	T	A	X	Y	d1	d2	h	Unit Price
SGRMZ (Oil Free Copper Alloy)	15	10	40	5	5	8	4.5	4.5	-
			60						-
			80						-
			100						-
	20	15	60	7	7	9.5	5.5	5.5	-
			80						-
			100						-
			120						-
	25	20	80	10	10	11	6.5	6.5	-
			100						-
			120						-
			150						-
30	25	80	10	10	14	9	9	-	
		100						-	
		120						-	
		200						-	

Ordering Example: Part Number - T - A
SGRMZ20 - 15 - 120

